



## MONITORS SAT

**1072**

- FANLESS system
- Industrial circuits and components
- Touch solution with high durability
- VESA mounting system
- Integrated VGA interface

### BENEFITS

- Pantalla táctil resistiva
- Pantalla de Alta resolución 1024x768
- Solución ideal para alto tráfico
- Especial para montaje en Pared

### PORTS



### WARRANTY




Contamos con el personal e infraestructura necesaria para darle un excelente servicio Post-Compra.

### DESCRIPTION

The 1072 touch monitor comes with a metal table stand with a hard plastic cover. It is compatible with other mounting options using the VESA standard hole pattern on the rear monitor part. The touch screen recognizes touches coming from a simple pencil, finger, gloved hand, pen or different pointed tools. Thanks to its industrial components it is a durable monitor, suitable for high traffic areas.

### APPLICATIONS

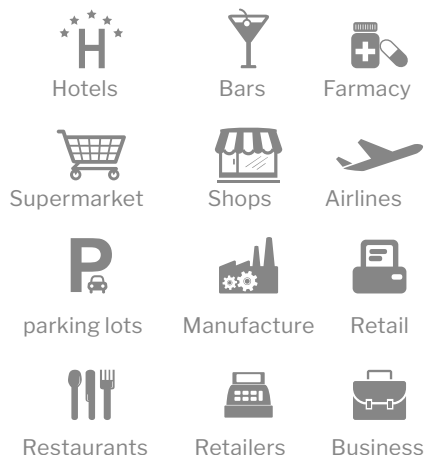

VESA mounting option





## TECHNICAL SPECIFICATIONS

| Specifications     |                       | Description                           |
|--------------------|-----------------------|---------------------------------------|
| Screen             | Colour                | Negro                                 |
|                    | Touch technology      | Pantalla táctil resistiva de 5 toques |
|                    | Screen size           | Monitor TFT, 17"                      |
|                    | Resolution            | 1024x768                              |
|                    | Number of colors      | 16.7M colores                         |
|                    | Brightness            | 250cd/m2                              |
|                    | Response time         | 12ms                                  |
|                    | Contrast ratio        | 400:1                                 |
| Ports I / O        | Touch interface       | VGA                                   |
| Ambient conditions | Operating temperature | 0 ~ 40°                               |
|                    | Storage temperature   | *-20 ~ 60°                            |
| Feeding            | Energy supply         | Adaptador AC - DC                     |
|                    | Input voltage         | 60Hz - 75Hz                           |
| Certifications     |                       | FCC-B, CE, UL, TUV                    |

